

Grid E

nt product is c
with redundancy

or competitively



System Specifications

High Voltage




10kW INVERTER



12.5kWh Battery cabinet

- allows up to 10% overloading to maximize power output and features.
- Uninterruptible Power Supply function (UPS) to inductive loads such as air conditioners or refrigerators with an automatic switchover time of less than 10 milliseconds.

System Specifications

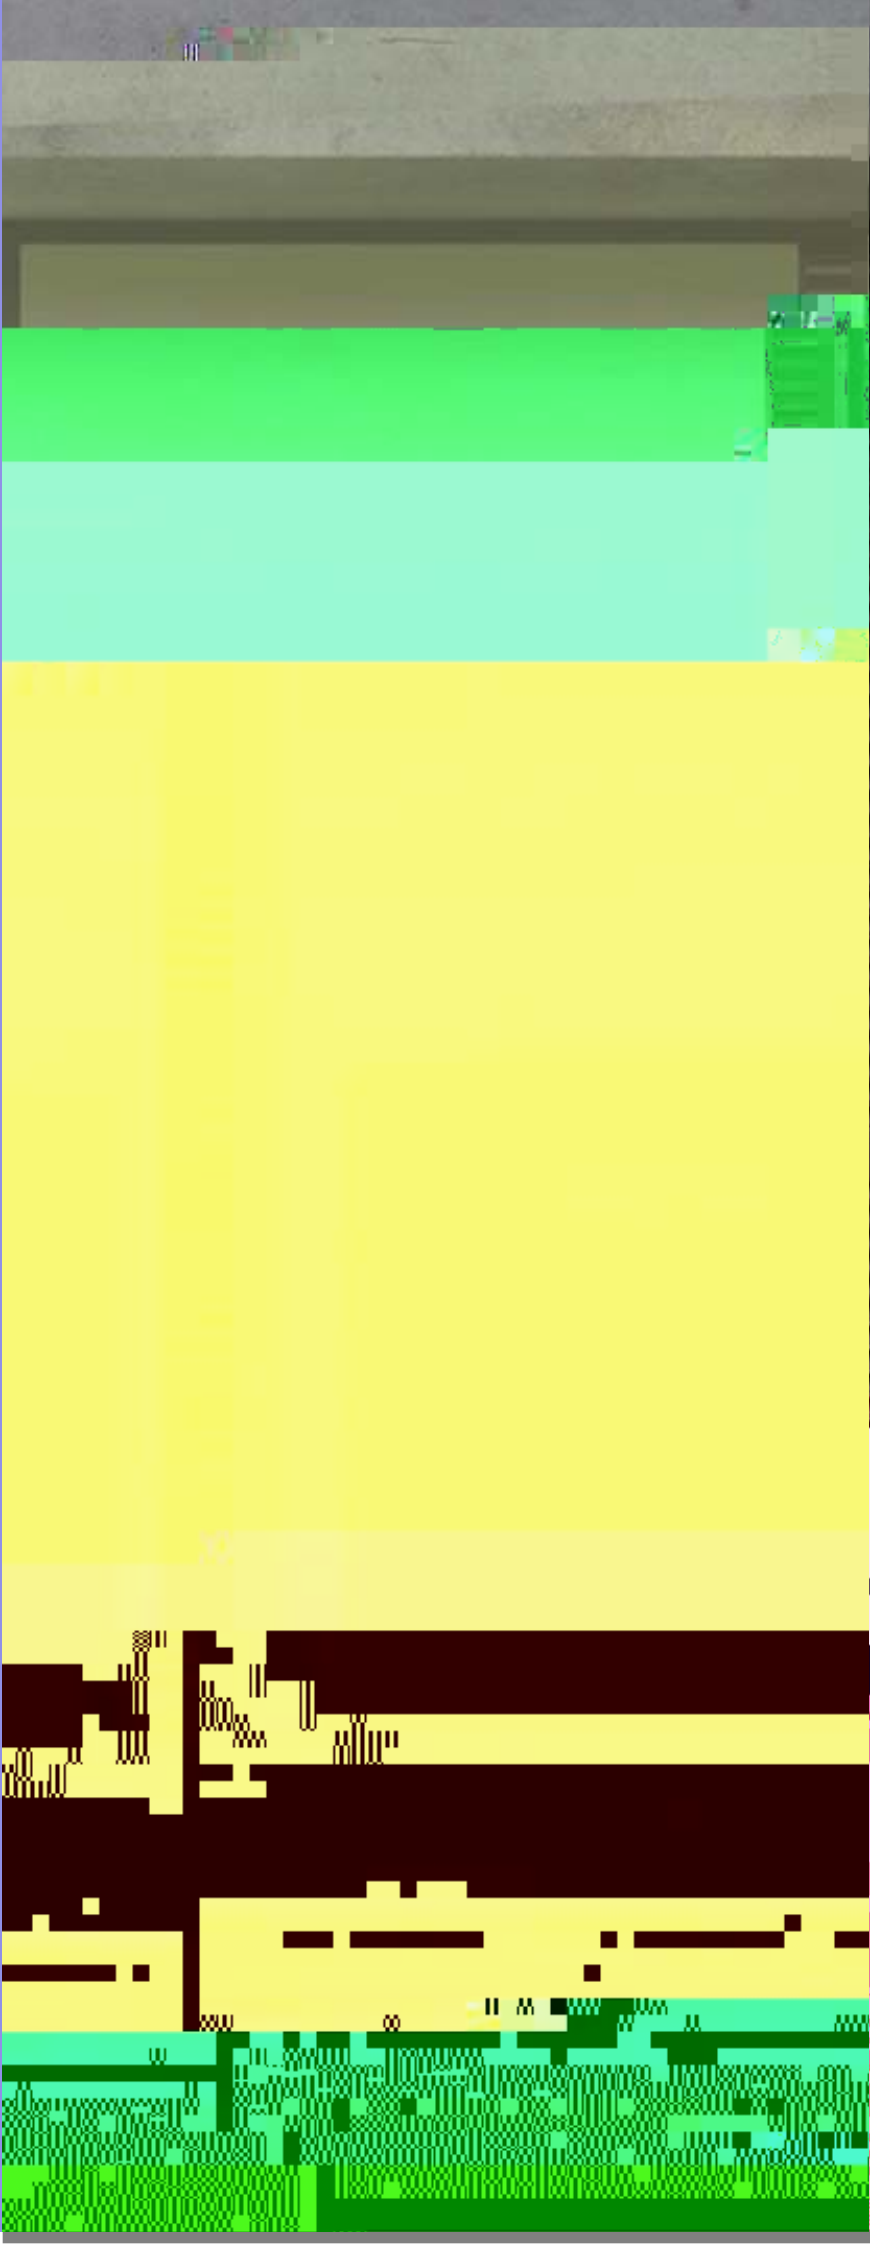

For single phase version Parameters

Self consumption
Off-grid & AC Bypass

Item description	3kW-7.2kWh	5kW-9.6kWh
Max. PV Input power	4kW	4kW
MPPT range	30-115V,Max. 145V	
AC rated power	4kW	5kW
Output voltage	Single phase 230Vac 50/60 Hz,	
Battery capacity	7.2kWh	9.6kWh
Max. capacity	4 cabinet in parallel, Max. 38.4kWh	
Battery voltage	48V,(Inverter:40-60V;BMS:42-51.5V)	
IP level	IP20(inverter),IP55(Battery)	
Cycle life	•6000 cycles,80%DOD,@25- 00.5C070%EoL	
Operating mode	Off grid	
Dimension (W*H*D, mm)	295*468*120mm(Inverter);570*1150*285mm(Battery 140*303*525mmP0 91(ry)J-1219.377[t]-7.2(y)12(inv2 Tc[Tc1.030mm)1/TT4 1 Tf23133 (Weight09 T(li416 re0163	